

ZONZEN

Screw Type Thermocouple



ZZ-ST01

Dimensions



Specification


Calibration	K, J
Conductor Dia.	2*7/0.2mm, 2*1/0.5mm, 2*7/0.3mm, 2*1/0.8mm
Construction	Parallel, Flat
Insulation & Shield	FB-SSB, FB-FB-SSB
Accuracy	Class 1
Hot Junction	Grounded, Ungrounded
Temp.Range	0-480℃
Lead Wire Length	1M-10M
Screw Size	W1/4, W5/16, M6, M8
Screw Material	Stainless Steel, Copper Plating Nickel

Bayonet Spring Thermocouple




ZZ-BST01

Dimensions



Specification

Calibration	K, J
Conductor Dia.	2*7/0.2mm, 2*1/0.5mm, 2*7/0.3mm, 2*1/0.8mm
Construction	Parallel, Flat
Insulation & Shield	FB-SSB, FB-FB-SSB
Accuracy	Class 1
Hot Junction	Grounded, Ungrounded
Temp.Range	0-480℃
Lead Wire Length	1m-10m
Bayonet Cap ID	12.40mm
Bayonet Slot	1 or 2
To Suit Spring Dia.	5mm
Probe Tube Dia.	4.8mm
Probe Tube Length	15mm-30mm
Material of Bayonet, Spring & Adaptor	Copper Plating Nickel

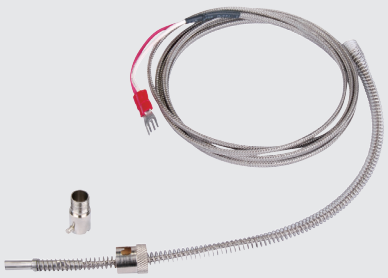


ZZ-BST02




ZZ-BST03

Probe Tube Thermocouple

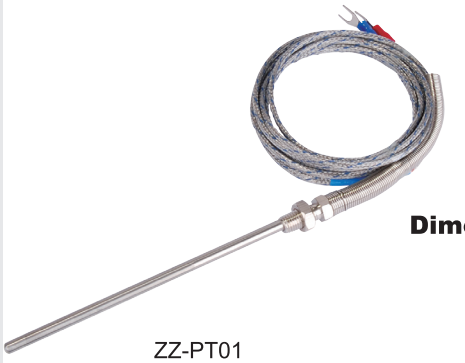

ZZ-PT01

Dimensions



Specification

Calibration	K, J
Conductor Dia.	2*7/0.2mm, 2*1/0.5mm, 2*7/0.3mm, 2*1/0.8mm
Construction	Parallel, Flat
Insulation & Shield	FB-SSB, FB-FB-SSB
Accuracy	Class 1
Hot Junction	Grounded, Ungrounded
Temp.Range	0-480℃
Lead Wire Length	1m-10m
Probe Tube Dia.	5.0mm
Probe Tube Length	100mm-300mm
Material of Probe Tube	Stainless Steel



ZZ-PT02



ZZ-PT03

Armour SS Tube Thermocouple



ZZ-AST01



ZZ-AST02

Specification

Calibration	K, J
Conductor Dia.	2*7/0.2mm, 2*1/0.5mm, 2*7/0.3mm, 2*1/0.8mm
Construction	Parallel, Flat
Insulation & Shield	FB-SSB, FB-FB-SSB
Accuracy	Class 1
Hot Junction	Grounded, Ungrounded
Temp.Range	0-480℃
Lead Wire Length	1m -10m
Probe Tube Dia.	4.8mm
Probe Tube Length	100mm-300mm
Material of Probe tube	Stainless steel
Armour Stainless steel tube dia.	OD:6.8mm, ID:4.8mm
Armour Stainless steel tube length	1m - 3m